


Equipment
prepared
for inline

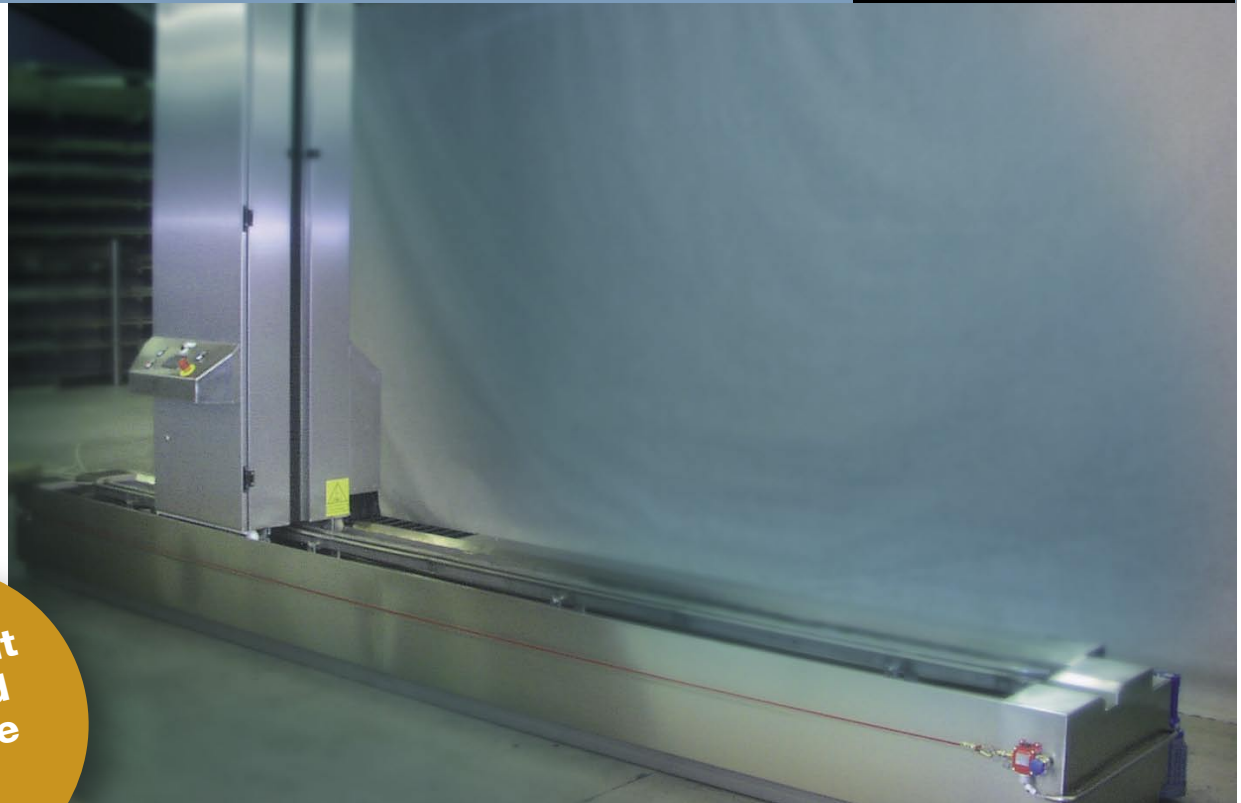

StencilMaster

DEVELOPING MACHINE

Automatic function

Individual programming

Re-circulation of water

**Drying of the screen
in the machine**

**Band filter for continues
filtering of the water**

Master frame

Oscillating nozzles

Infinitely variable speed


**Infinitely variable water
pressure**

**Automatic loading and
unloading of 10 or more
screens**

**Automatic screen loading
from direct projection
camera etc.**


Degreasing possible

Our solution is based on 15 years experience.

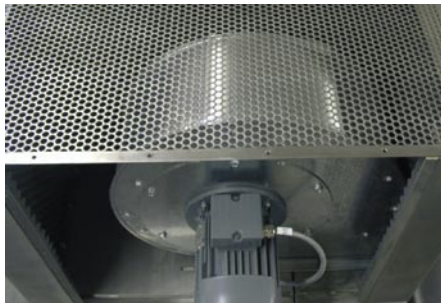


Integrated drying of the screen

As a continuation of the automation of screen making the NOTIO StencilMaster can be equipped with an integrated air-drying of the screen. The screen stays in the machine during the drying process and will be partly or fully dried, according to the set program. In that way the operator can use his or her time in an efficient and flexible way.

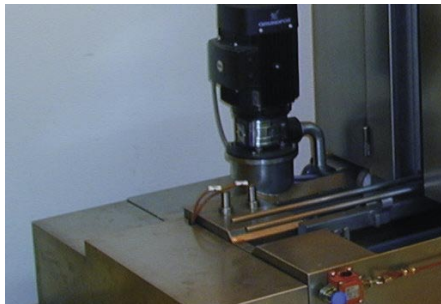

Re-circulation of water and Variable water pressure

The machine can be equipped with a separate tank, separate nozzles, filter and pump in order to use re-circulated water apart from the last rinse. Water prices will continuously rise in the future meaning that important savings are achieved now and in the future with this option. Furthermore the water pressure can be regulated above the 3 Bar from the water supply.

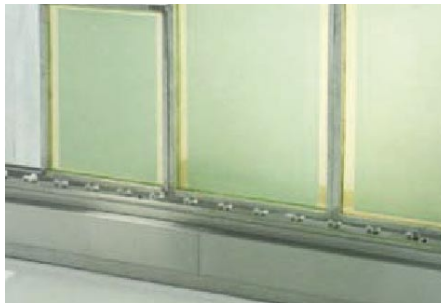


Loading of several screens

The open construction offers many advantages. On or more screens are placed in the machine and the tower with nozzles are moving backwards and forwards. A number of screens can be positioned in the machine even if the screen sizes are different. When the process is finished the screens is manually or automatically unloaded.



Automatic loading and unloading of screens

Based on our experience we have developed an automatic loading and unloading system that can be designed as required. The screen can be loaded automatically and unloaded into an unloading station as shown on the photo. Another possibility could automatic loading from a camera and in-line transport trough the machine for un-loading into the station.

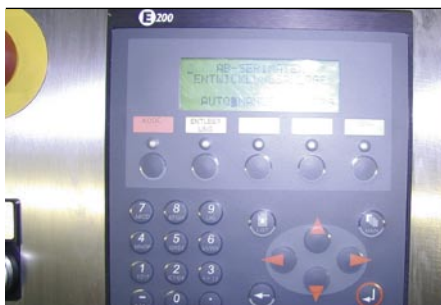

Degreasing and Computercontroller

It is possible to supply the machine with an additional chemical system for degreasing. With the computer controller it is possible to choose any possible process, depending on the actual photo emulsion, exposure method, etc. The adjustment possibilities ensure best possible adoption of new types of emulsion, etc.

Distributor:

NOTIO

Salg:

NOTIO
Emil Reesens Vej 1
DK-7400 Herning
Tel: +45 7023 2498
Fax: +45 7020 6237
notio@rostech.dk
www.notio-abs.dk

Produktion:

AB-Inventech AS
Eli Christensensvej 76-80
DK-7430 Ikast
Tel. +45 9715 5022
Fax +45 9715 1788
ab@ab-inventech.dk
www.ab-inventech.dk